

auralite[®] (CME)

CME Q Plus Basic Indicator



Product Codes

auralite[®] (CME) - **TP517**

Description

auralite[®] CME has six LEDs which display;

- Setback - Unit is running at Setback Speed.
- Normal - Unit is running at Normal Speed.
- Boost - Unit is running at Boost Speed.
- Humidity Control - Humidity sensor is controlling unit's fan speed.
- Boost Overrun - The Boost Overrun Timer is active.
- Fault - Unit has a fault - Contact the installer.

auralite[®] CME is to be used with Titon's CME units with product code ending "CH". For compatibility please contact us on +44 (0)1206 814879 or ventsales@titon.co.uk.

Specification

Dimensions: 90mm wide x 90mm high x 12mm deep

Weight: 50g

Finish: High gloss finish

Materials: Polycarbonate

Guarantee period: 1 year


Electrical: 12V DC

Installation: Suitable for mounting on a standard UK recessed pattress box. Supplied with screws.

Features

- Meets guidelines for occupant accessibility
- Increase occupant awareness of system operation
- Can be sited remotely from unit in an easy to access location
- Discreet design
- Fits a standard UK pattress box
- Compatible with Titon CME units

Drawing and Dimensions

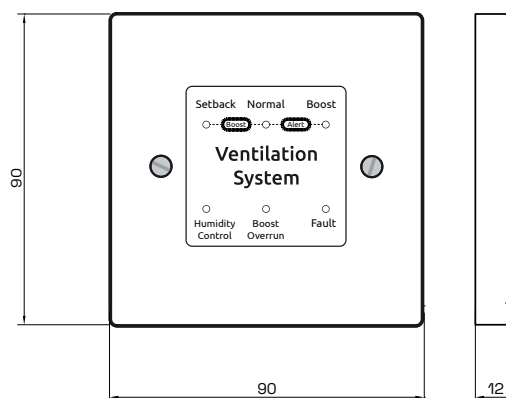

Dimensions in mm